SURVEY PLAT
LOCATED SW 1/4, SEC. #22
T6N, R4E SPRINGFIELD TWP.
WILLIAMS CO., OHIO

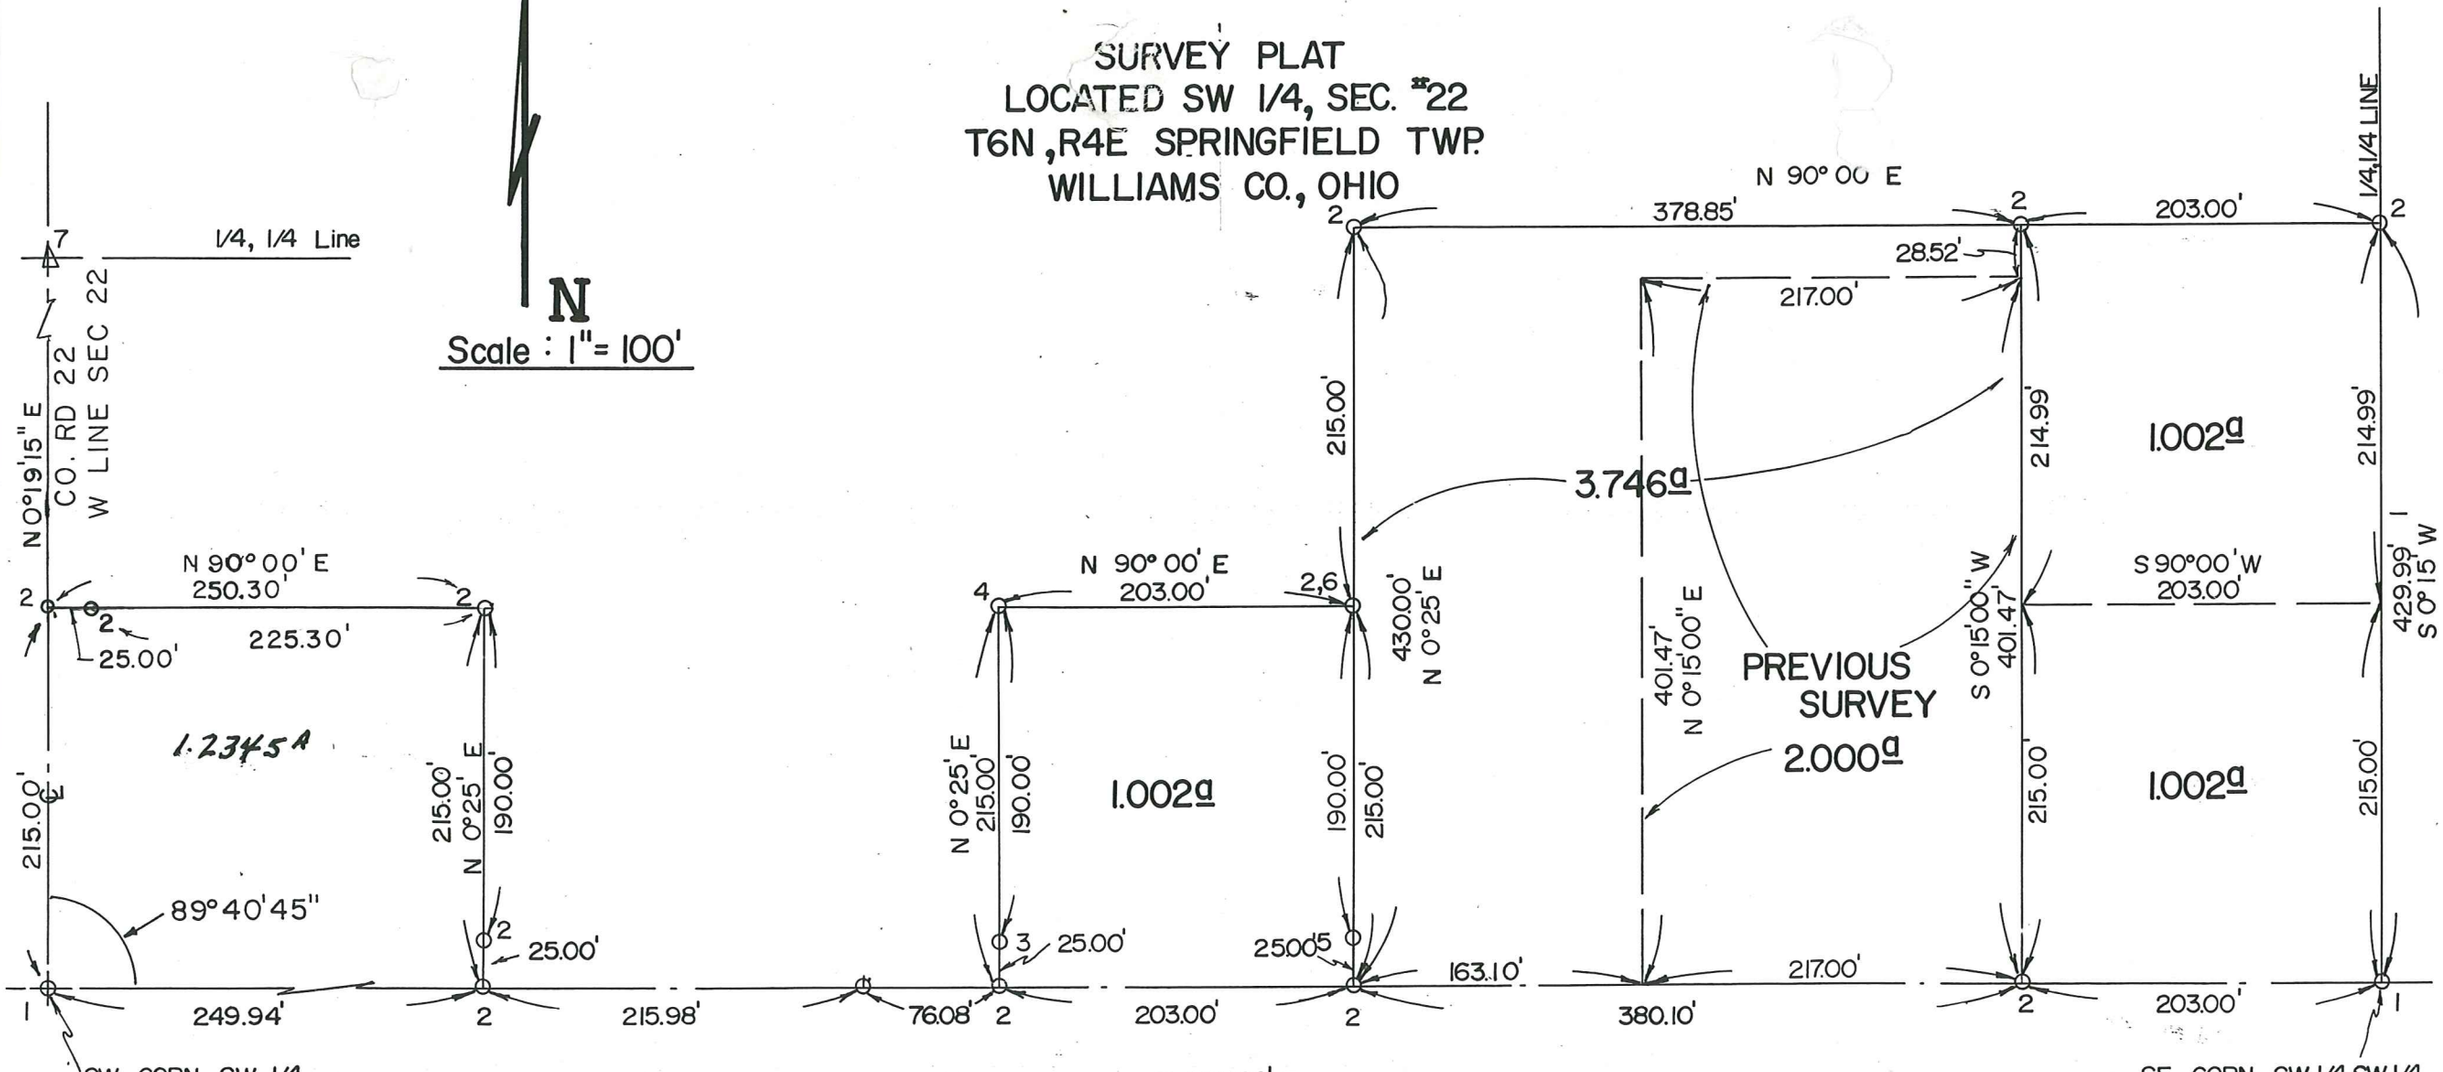

"I do hereby certify that I have surveyed the premises and prepared the attached plat and that the plat is corect."

"All dimensions are shown in feet and decimal parts thereof. Dimensions on curves are cord measurements. This survey has been recorded in Vol. 10R, Page 105 of the Williams County Record of Surveys."

N 90° 00' E
1328.10'
CO. RD. "C"
S. LINE, SEC. #22

(1) Bearing taken from survey filed in Vol. 9R, Pg. 101

LEGEND

1) Fd. R.R. Spike
2) Placed 5/8" Iron Pin
3) Fd. Iron Pin 0.28'W.,0.00N. Of True Point
4) Fd. Iron Pin 0.26'W.,0.03'N Of True Point
5) Fd. Iron Pin 0.31'W.,0.08'S Of True Point
6) Fd. Bent Pin
7) Set Iron Pin Over Stone

Anthony H. Hoeffel

Anthony H. Hoeffel S-6149
BRYAN ENGINEERING & SURVEYING
4/20/85 Rev 10/19/01 636-2060

Rev 4/27/85