

COURSE	BEARING	DISTANCE
1	N 32° 03' 51" W	184.76'
2	N 43° 39' 47" W	277.88'
3	N 86° 25' 11" W	182.40'
4	N 42° 32' 55" W	251.80'


A SURVEY BEING PART OF THE NORTHEAST QUARTER OF SECTION 22,  
 T. 9-S., R. 2-W., MADISON TOWNSHIP, WILLIAMS COUNTY, OHIO  
 for: Thorp Realty

- A = Iron pin fd on E. line, N.E. 1/4, Sec. 22 & intersection of Co. Rd. R
- B = Iron pin fd
- C = Point established
- D = Iron pin fd @ N.E. cor., N.E. 1/4, on previous survey by others
- E = 5/8" x 30" Iron pin & reference cap set this survey

I hereby certify this to be a true copy of a survey made by me and to be correct to the best of my knowledge. The bearings used herein are for the purpose of describing angles only and are not referenced to true or magnetic North.

*Chester A. Miller*  
 Chester A. Miller  
 Registered Surveyor No. 6691

WM 9488 APRIL 6, 1994  
 Revised: July 14, 1995

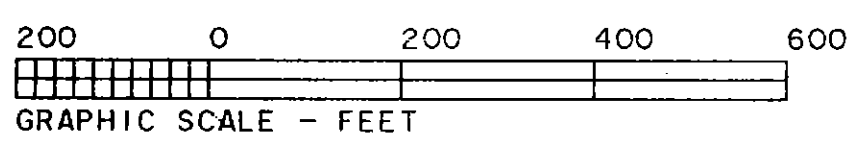

ERNSBERGER, MILLER & ASSOC.  
 Engineers - Surveyors  
 507 West Second Street  
 Delionce, Ohio 43512  
 (419)-782-9230